


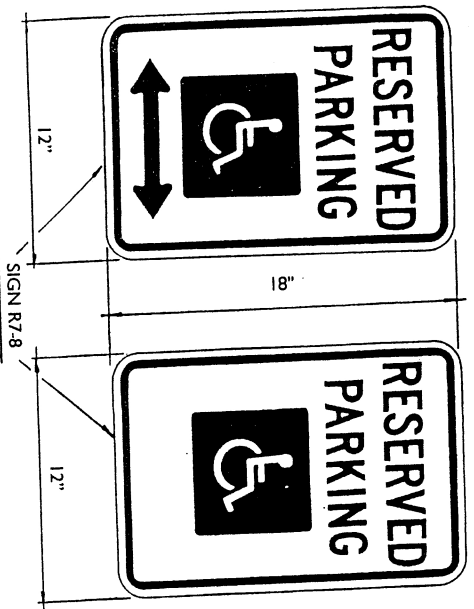

Standard colors (all signs):


Background - White

Figure - White on Blue Field


Lettering/Border - Green

Arrow - Green

Corner Radius - 1 1/2" (typical)

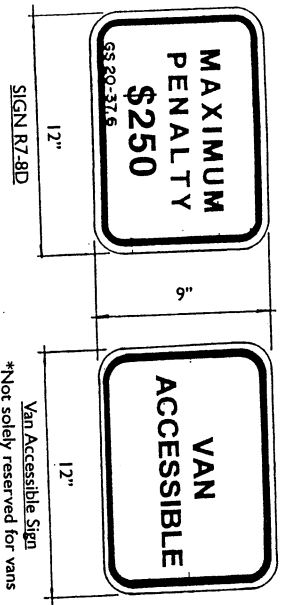

4.1.2 - Signs at accessible parking spaces (Part I)

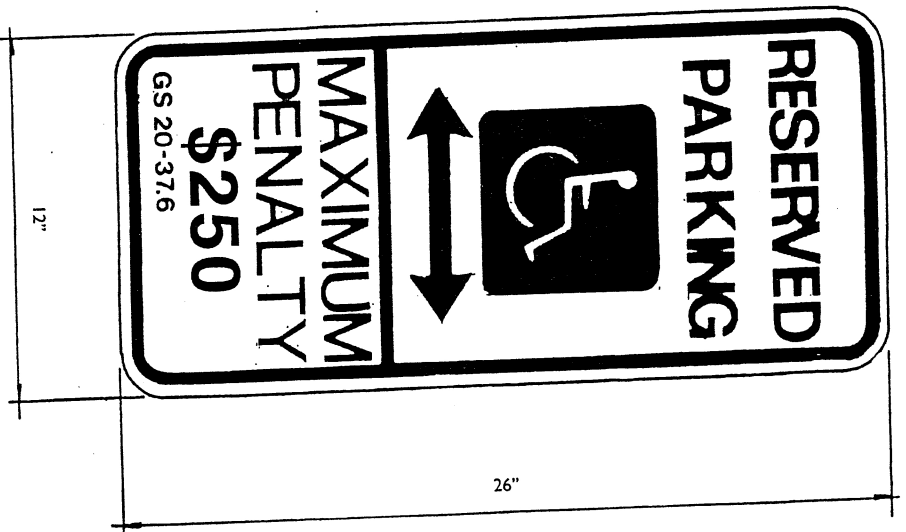





SIGN R7-8E

(Colors/corner radii same as 4.1.2 - Part I)

This sign may be used in place of signs R7-8/R7-8D (See 4.1.2 - Part 3)

4.1.2 - Signs at accessible parking spaces (Part 2)

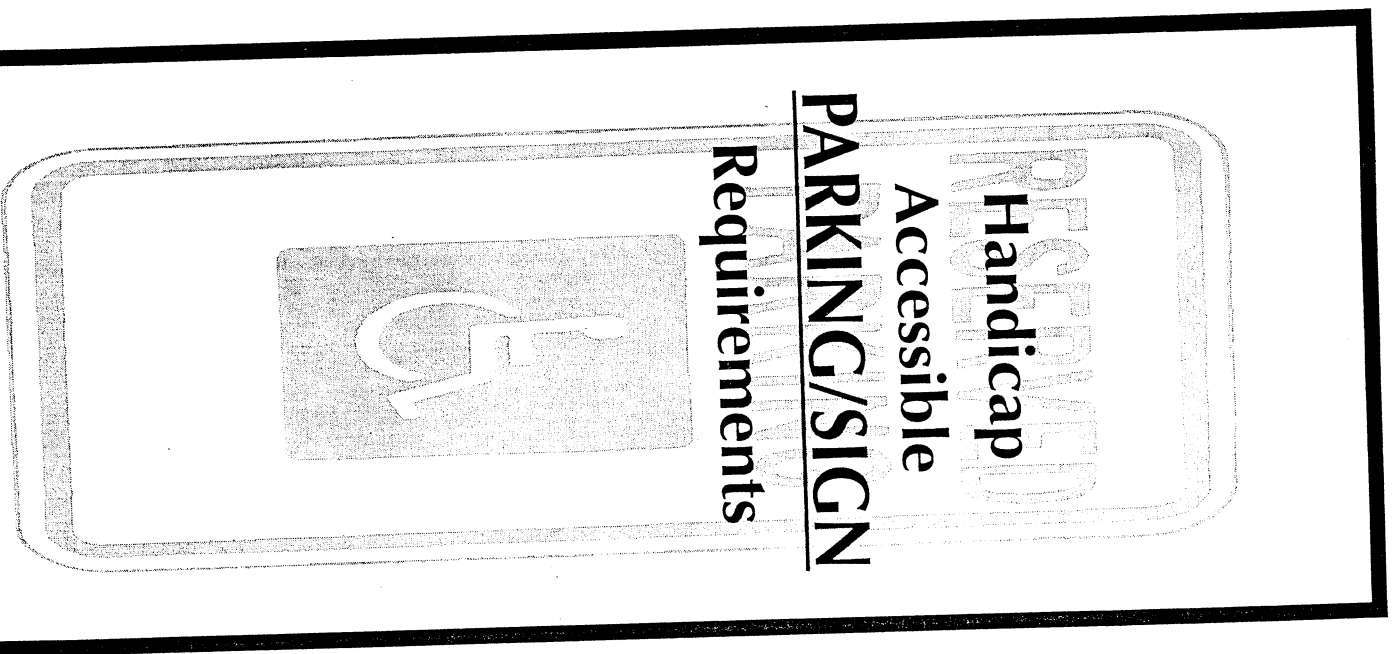


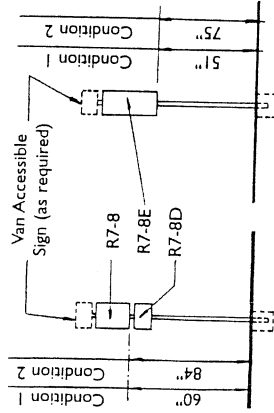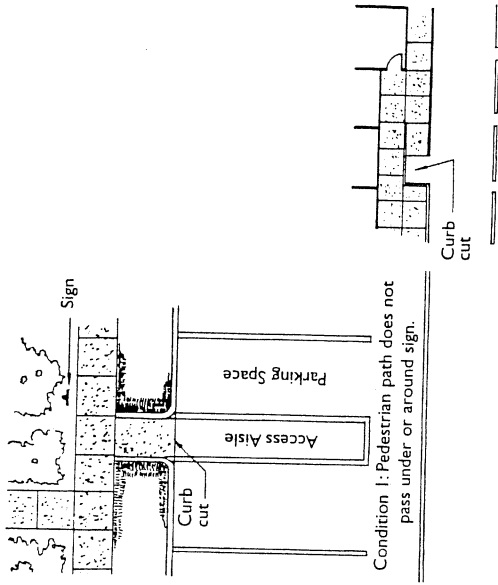

General notes:

1. Regardless of age, all accessible spaces shall be identified by aboveground signs only. (See N.C.G.S.)
2. New spaces shall not use ground-painted symbols
3. Accessible spaces are required to be striped off only; blue coloring is not necessary nor required
4. Striping is white on dark pavement; black on light pavement. (N.C.D.O.T.)


4.1.2 - Sign mounting heights at accessible spaces (Part3)

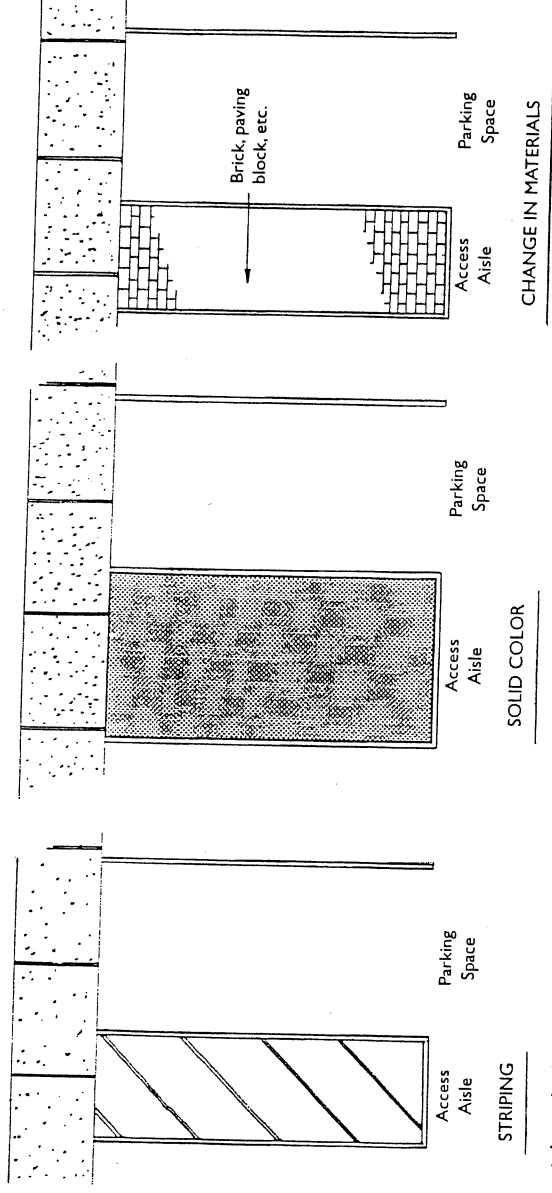

Access aisles shall be clearly marked out:

1. Methods for marking are not limited to the examples illustrated above
2. Change in materials includes compliance with chapter 9 both at the transition perimeter and in the access aisle itself
3. For unpaved parking fields (Clay, Marl, etc.) which will not hold paint, an accessible parking area(s) shall be identified with the appropriate above-ground signs

4.2.3 - Delineation (marking) of parking access aisles

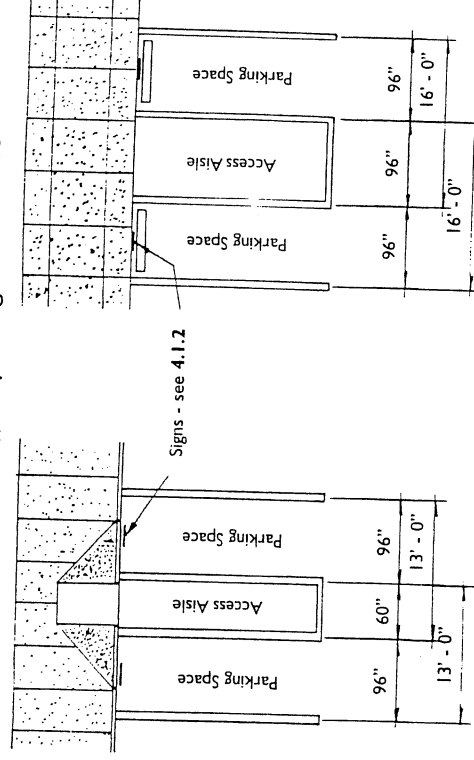

4.4.1 - Parking space(s) for standard (non-van) vehicles

- 4.4.2 - Parking space(s) for vans
- 4.4.2.1 - If a non-van parking space sharpens an access aisle with a van accessible space, then the access aisle shall be 96" wide.

All dimensions are minimum

4.4 - Sizes of accessible parking spaces